

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


NOTES:

- 1) DIMENSIONS IN [] ARE MILLIMETERS
- 2) SOLID ALUMINUM BODY WITH STEEL SHACKLE
- 3) LOCK BODY AND SHACKLE PROTECTED BY COLORED VINYL SHEATH
- 4) 6-PIN CYLINDER
- 5) KEY RETAINING
- 6) AVAILABLE IN
 - *RED (PSL-8)
 - *BLUE (PSL-8BU)
 - *GREEN (PSL-8GR)
 - *BLACK (PSL-8BL)
 - *YELLOW (PSL-8YL)
 - *ORANGE (PSL-8OR)
- 7) AVAILABLE WITH CUSTOM KEYING

The technical drawing shows a Panduit padlock with the following dimensions:

- Front View:**
 - Shackle width: .75 [19.0]
 - Shackle height: 1.50 [38.1]
 - Body height (excluding shackle): 1.220 [31.0]
 - Body width: 1.575 [40.0]
 - Keyhole width: 1.00 [25.40]
 - Keyhole height: 1.772 [45.0]
 - Body thickness: .26 [6.6]
- Side View:**
 - Body width: .787 [20.0]

- 1) DIMENSIONS IN [] ARE
MILLIMETERS
- 2) SOLID ALUMINUM BODY WITH
STEEL SHACKLE
- 3) LOCK BODY AND SHACKLE
PROTECTED BY COLORED
VINYL SHEATH
- 4) 6-PIN CYLINDER
- 5) KEY RETAINING
- 6) AVAILABLE IN
 - *RED (PSL-8)
 - *BLUE (PSL-8BU)
 - *GREEN (PSL-8GR)
 - *BLACK (PSL-8BL)
 - *YELLOW (PSL-8YL)
 - *ORANGE (PSL-8OR)
- 7) AVAILABLE WITH CUSTOM
KEYING

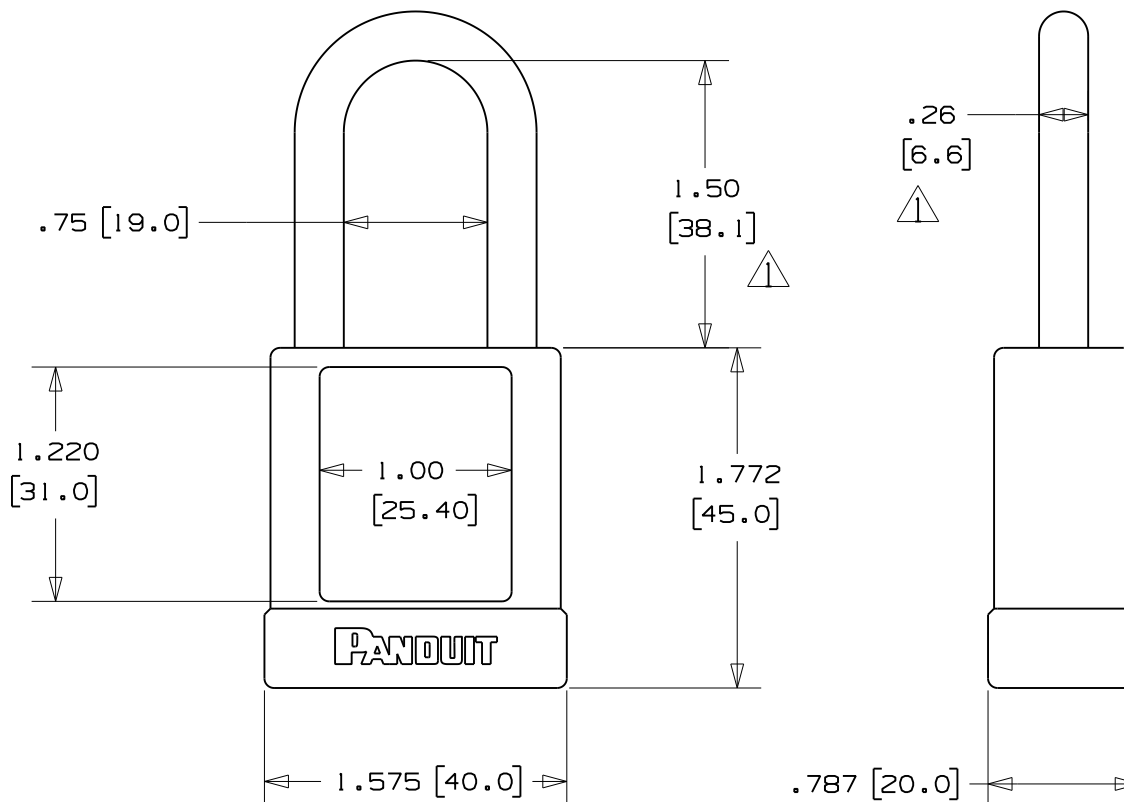

									CAD FILENAME/LAYERS	I00923DA_DC_C10704/00B		
									PANDUIT CORP. TINLEY PARK, ILLINOIS			
									PSL-8 CUSTOMER DRAWING			
									UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ± .150 (.3.81) (.XXX) ± .031 (.787) (.XX) ± .10 (.2.54) ANGLES ± 5°		UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.	
1	12-02-09	JHAC		CHANGED MM DIMENSIONS	5919	R			DRAWN BY JHAC	MAT'L:	SCALE	1 : 1
0	5-14-08	JHAC		DRAWING RELEASE	5437	R			DATE 5-14-08	PVC	DRAWING NO. C10704	DWG SIZE A
REV	DATE	BY	CHK	DESCRIPTION	ECN	- R	CUST	SUP	CHK'D			