DEenergize.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

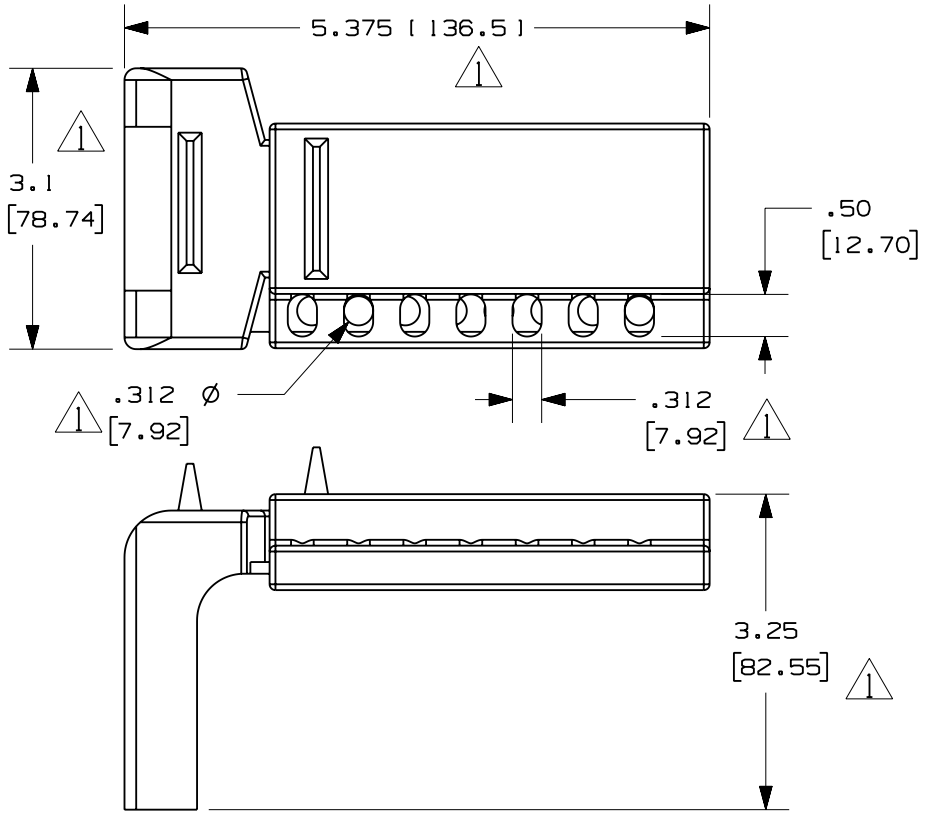

PART NUMBER	VALVE SIZE in. [mm]	STANDARD PKG.	MAX. HANDLE LENGTH
PSL-BV1	3/8" - 1 1/4" [9.525 - 31.75]	1	7.5" [190.5]

NOTES:
1. MILLIMETERS SHOWN IN ( ).
0 2. INSPECT FOR COLOR REQUIREMENT.

REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP
1	2/6/08	RVU		.312 [7.92] DIA. WAS .285 [7.24]. .312 [7.92] WAS .30 [7.62]. 3.1 [78.74 WAS 3.00 [76.20]. 3.25 [82.55] WAS 3.50 [88.90]. CHANGED TABLE, VALVE SIZE. REMOVED P/N: PSL-BV2.	5282 R		
0	1-24-06	RVU	DWY	ADDED PANTONE COLOR #.	4335 R		
R	9-12-03	RVU	DWY	DRAWING RELEASE	3399 R		

CAD FILENAME/LAYERS: 100619XK_C10096_PSL-BV_01.prt

PANDUIT CORP. TINLEY PARK, ILLINOIS

PSL-BV BALL VALVE LOCKOUTS

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
(.X) ± (.XXX) ±
(.XX) ± ANGLES ±

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY: RVU
DATE: 9-12-03
CHK'D:

MAT'L; 0
RED POLYPROPYLENE PANTONE PMS 186

SCALE: NTS
DRAWING NO.: C10096
DWG: A
SIZE